STANDARD HINGES

C98 Series Φ35mm Angled Hinges



DTC
Global Quality Benchmark

HINGE SERIES


PRODUCT



DESCRIPTION

- Depth of hinge cup: 11.3mm
- Diameter of hinge cup: 35mm
- Range of door thickness: 14-24mm
- Possible drilling distances on the door(K): 3-7mm

APPLICATION



ORDER INFORMATION




Φ35mm Options of screws and dowels:

M10 dowel, Dowel No: **M**	Expandable dowel, Dowel No: **K**
M8 dowel, Dowel No: **N**	Expandable dowel, Dowel No: **K0**
Euro screw, Dowel No: **B**	Quick dowel, Dowel No: **T0**


Φ35MM CORNER DOOR,BI-FOLD DOOR,-45°~45° ANGLED HINGE APPLICATIONS

Kitchen corner door applications

45°




135°

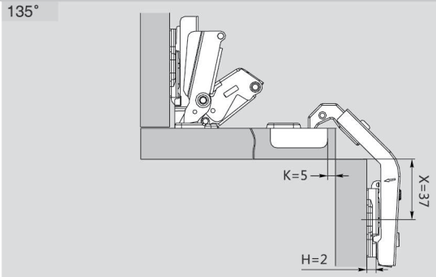


Negative angled hinge applications


-45°



-30°




-15°




Positive angled hinge applications


45°




30°




15°



Φ35mm Hinge cup types




The solution of assembly problems where doors are mounted at a positive or negative angle requires the verification of drilling distances by a practical trial. Please do not hesitate to consult our technical support department for assistance.



Nickel plated(A02)

90°



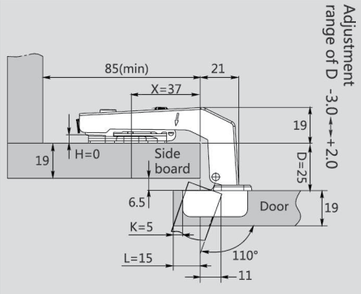

Adjustment range of L -2.0 +2.0

Sprung

Item No.	C98S676
Pcs/ctn	200