



Partial extension undermount slides installation

Drawer installation dimensions(with locking device)

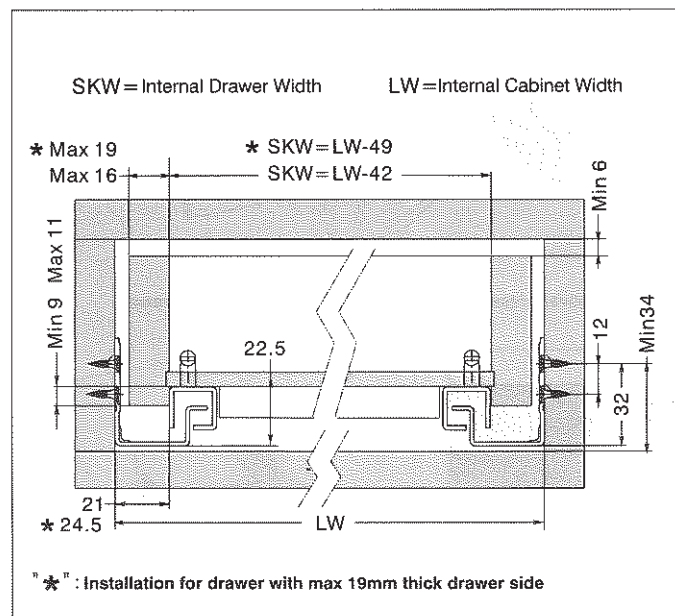


Drawer installation dimensions(with peg)

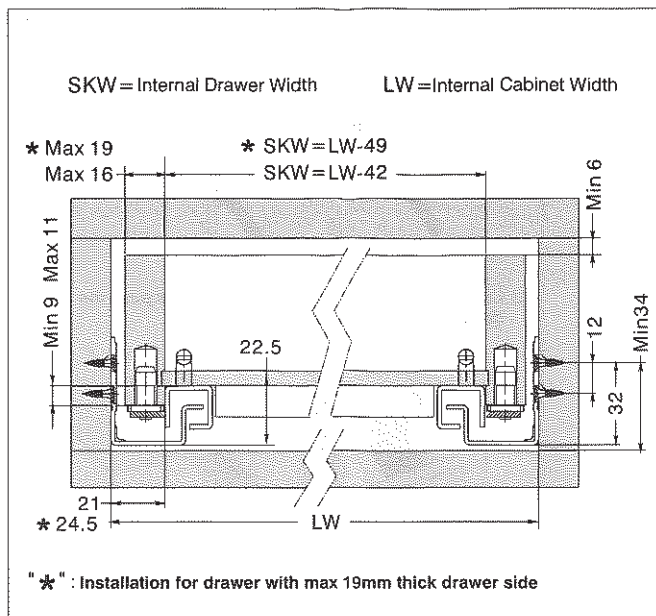


Drawer installation dimensions

NL = Nominal Slide Length LT = Internal cabinet Depth $LT_{min} = NL + 3$

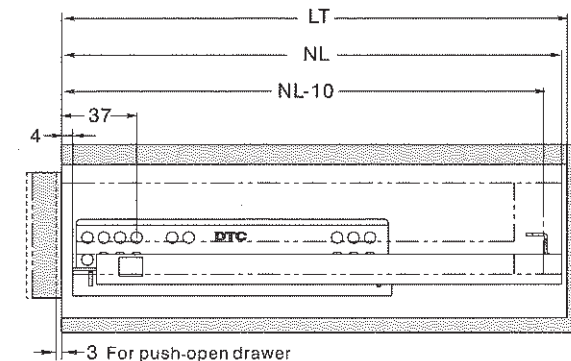


Inner drawer installation dimensions

NL = Nominal Slide Length LT = Internal cabinet Depth $LT_{min} = NL + 21$

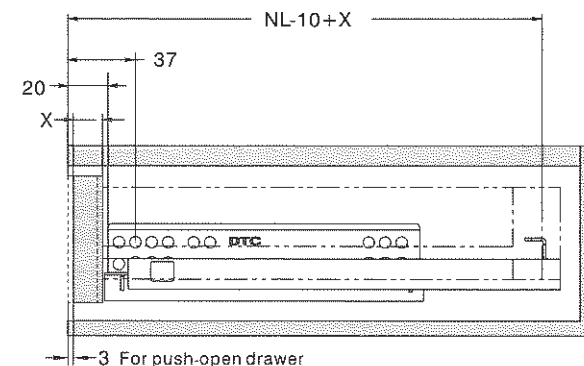


With Locking device installation

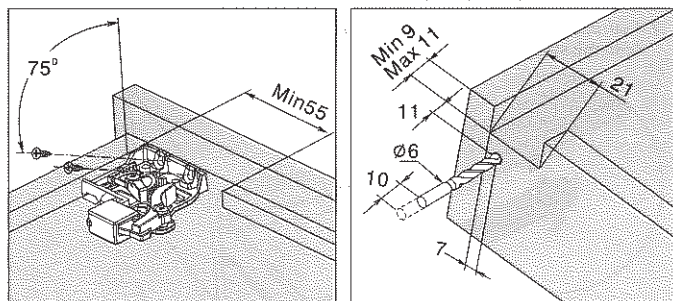


Drawer preparation

Soft close drawer

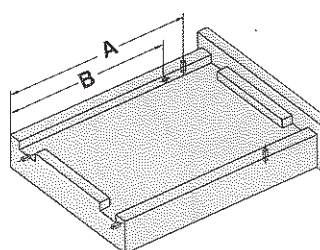


NL (mm)	A (mm)	B (mm)
250	220	188
270	230	198
300	245	213
350	270	238
400	305	273
450	330	298
500	355	323
550	390	358
600	415	383

Push-open drawer

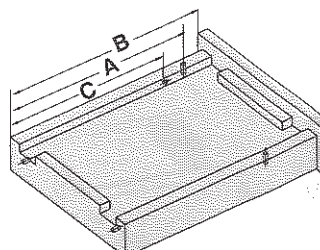

NL (mm)	B (mm)	A (mm)	C (mm)
250	240	221	189
270	260	241	209
300	290	271	239
350	340	321	289
400	390	371	339
450	440	421	389
500	490	471	439
550	540	521	489
600	590	571	539

With peg installation


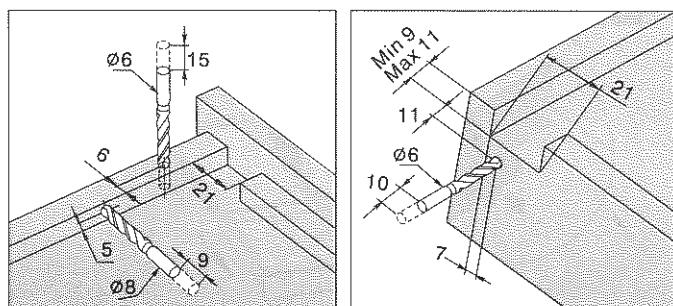


DTC
Global Quality Benchmark

Website: www.dtcddc.com


302710001-01860

Screw Positions of the Slides

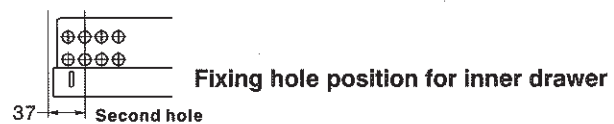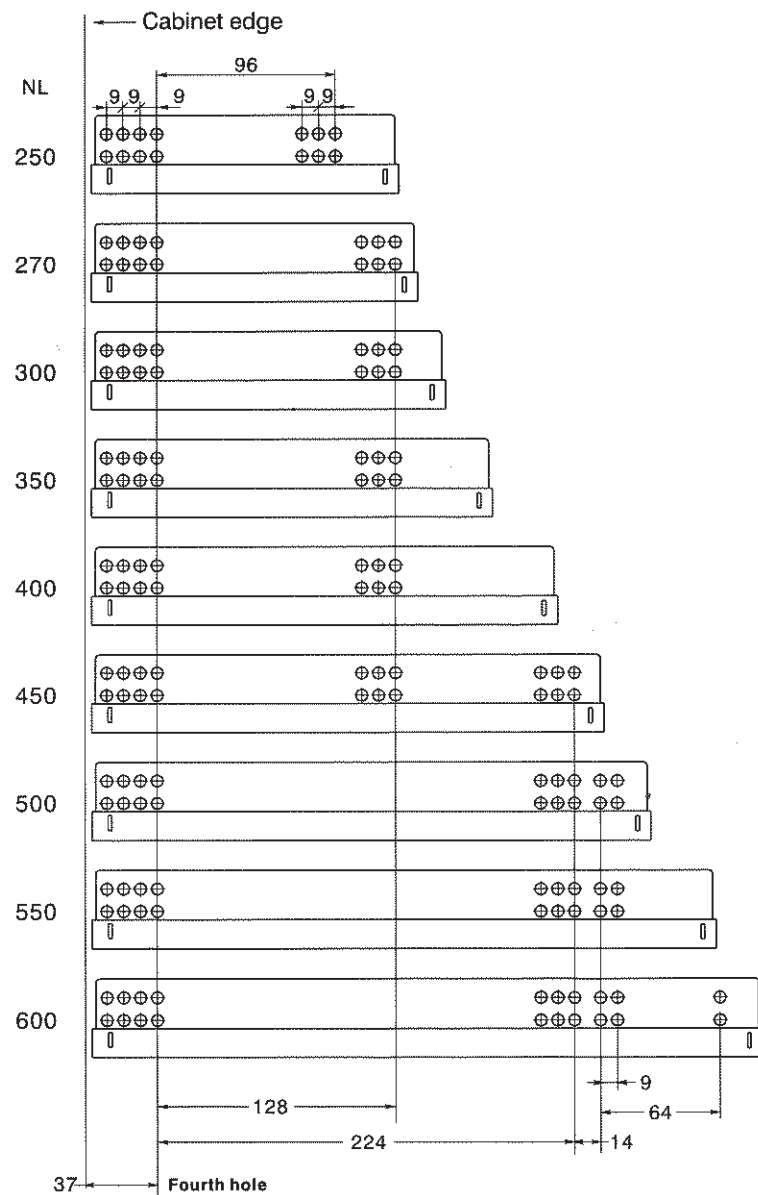


Drawer assembly and removal (with locking device)


1. Fix the slide onto the cabinet.




2. Fix the locking device onto the drawer bottom.

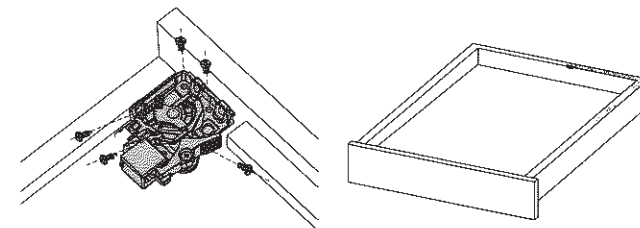

3. Lay the drawer bottom onto the slide then push the drawer into the cabinet.

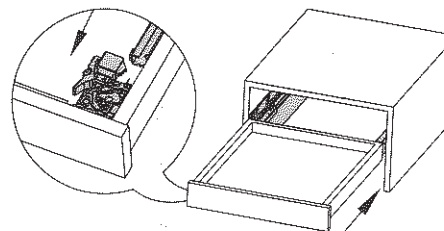


4. For removal, press and hold the handle and pull out the drawer.

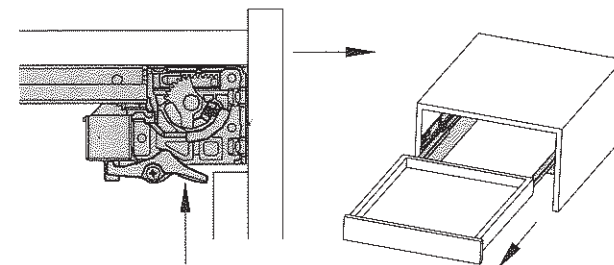


Drawer assembly and removal (with peg)


1. Fix the slide onto the cabinet.

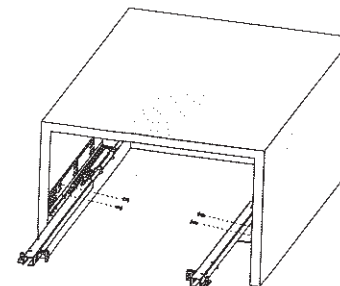

2. Pull out the drawer member of the slide from the cabinet, lay the drawer onto the slide.

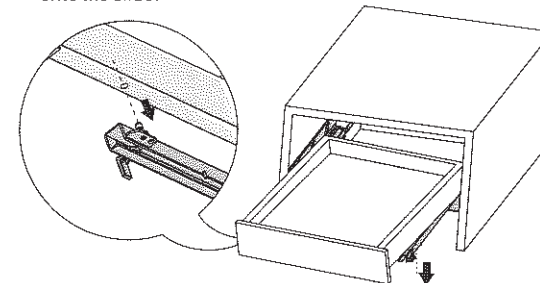

3. Press the locking pin into the drawer side to lock the position of the drawer.

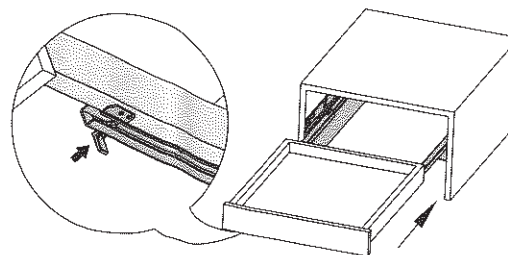

4. For removal, pull out the locking pin from the drawer side. Lift the drawer and pull it out from the cabinet.

